100"-AAPG-ANNIVERSARY

The Geophysical Corner is a regular column in the EXPLORER, edited by Satinder Chopra, chief geophysicist for Arcis Seismic Solutions, TGS, Calgary, Canada, and a past AAPG-SEG Joint Distinguished Lecturer.

Quantifying Shallow Seismic Anomalies

By RITESH KUMAR SHARMA and SATINDER CHOPRA

The determination of properties such as lithology, fluid content, porosity and permeability help us characterize a subsurface reservoir.

Such an exercise can be taken to the next step with the determination of petrophysical properties such as water saturation and volume of clay, which can aid the appraisal of a reservoir. All these properties can be obtained by lab measurements on core samples, or by carrying out petrophysical analysis on log curves, which are only possible at well locations. But as is generally the case, our goals are to characterize reservoirs not vertically, but spatially, and thus we turn to seismic data for their determination.

Impedance Inversion

The usual workflows for seismic differentiation between lithology and fluid content take advantage of their relationships between different elastic constants such as bulk modulus (measure of incompressibility of the rock), shear modulus (measure of rigidity) and Young's modulus (measure of stiffness), which can be seismically derived through the process of impedance inversion. Impedance inversion transforms seismic amplitudes, both prestack and poststack. into impedance values. There are different methods of impedance inversion, which we have described in our series of Geophysical Corner articles from May to July 2015.

In prestack seismic data, as the fluid/ lithology information resides on the far offsets, or large angles of incidence, a promising approach is the analysis of impedance with respect to different offsets/angles. Such a workflow is referred to as elastic impedance, which we described with examples in our Geophysical Corner article of October 2012.

But when it comes to the determination of petrophysical properties such as water saturation, effective porosity and permeability, an extension of the elastic impedance approach, called "extended elastic impedance" is utilized. The basic idea behind this workflow is that though typically the incident angle range is 0 to 30 degrees, it can be mathematically extended to a greater angle range, and by modifying the Zoeppritz formulation, extended elastic impedance reflectivities at different angles can be generated. By cross-correlating these generated reflectivities with the desired petrophysical property, the optimum angle can be determined, which can then be used to derive the desired petrophysical property from seismic data.

Accounting for High Amplitude Anomalies

In last month's Geophysical Corner (May 2017), we described the characterization of shallow high amplitude seismic anomalies in the Hoop Fault Complex area of Barents Sea that hosts shallow and deep-seated hydrocarbon accumulations. In particular, the objectives were to explore for potential reservoir prospects within the Mid-



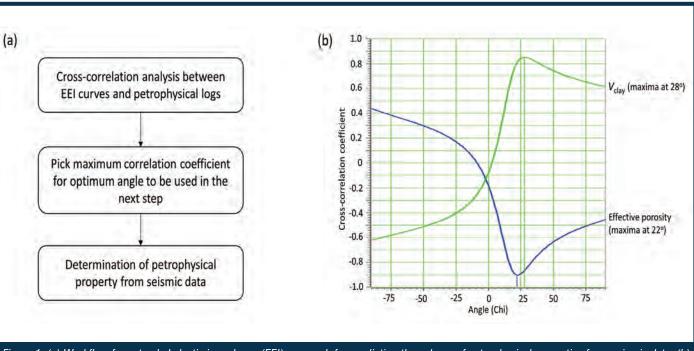


Figure 1: (a) Workflow for extended elastic impedance (EEI) approach for predicting the volume of petrophysical properties from seismic data. (b) Cross-correlation analysis for effective porosity (blue curve) and V_{clay} (green curve) with EEI curves. A maximum negative correlation is seen for effective porosity at 28 degrees, and a maximum positive correlation is seen for V_{clay} at 22 degrees.

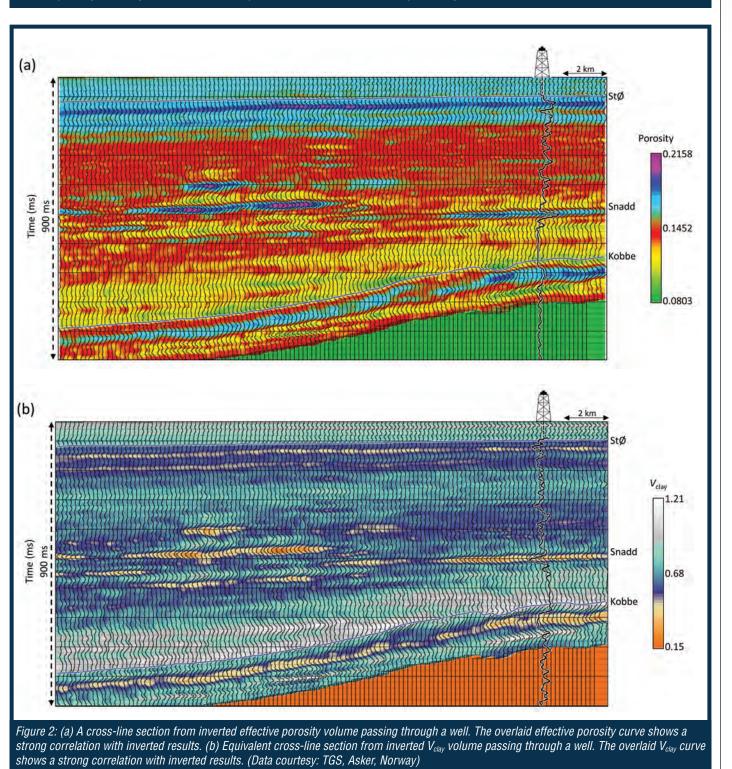

Continued on next page 22 JUNE 2017

WWW.AAPG.ORG

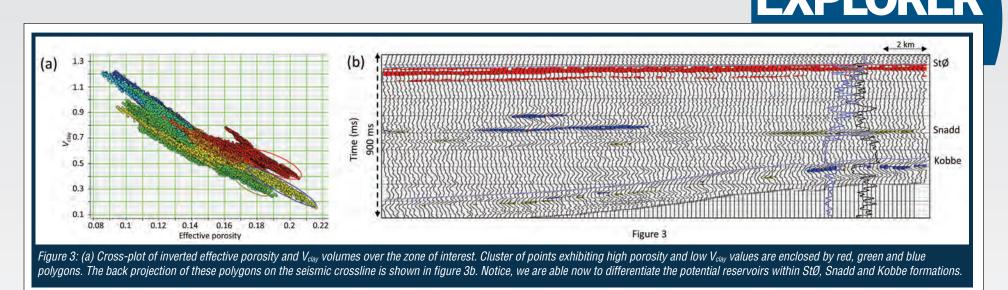

Continued from previous page

Jurassic StØ and Mid-Triassic Kobbe formations, encompassing the Snadd formation in-between.

As we mentioned in that article, there could be various reasons for high amplitude anomalies to show up on seismic data, and it is our objective to distinguish those seismic anomalies that are associated with hydrocarbons from those that are not. We demonstrated the application of spectral decomposition as direct hydrocarbon indicator that qualitatively identifies the hydrocarbon bearing zones. We pursue that exercise further with the application of extended elastic impedance approach. In figure 1a we show the workflow followed in this exercise. As we cross-correlate the extended elastic impedance reflectivities with the desirable V_{clay} and effective porosity log curves for different values of the angles, we plot the correlation coefficients as shown in figure 1b. The



Determination of petrophysical properties such as water saturation, effective porosity and permeability, can be carried out using extended elastic impedance approach.

maximum positive correlation coefficient of 0.85 for V_{clay} (green curve) is seen at 28 degrees, while effective porosity exhibits a negative correlation coefficient of 0.9 at angle 22 degrees (blue curve). These values of angle enable the determination of these properties from seismic data through the application of Zoeppritz equations.

In figure 2 we exhibit equivalent crossline sections from the effective porosity and $V_{\rm clay}$ volumes with the respective petrophysical log curves overlaid on them. A reasonably good

match between them is seen in both cases, which enhances our confidence in the application of the followed approach for the data at hand.

We take this analysis further and crossplot effective porosity and V_{clay} derived attributes as shown in figure 3a. Next, we enclose the cluster of points that exhibit high porosity and low values, or not-so-high values of V_{clay} with red, green and blue polygons, and back-project them on the vertical seismic. The latter step helps us understand where these cluster of points are coming



from in the different zones of interest. In figure 3b we see the differentiation of the potential reservoirs within the three formations of interest, namely the StØ, Snadd and Kobbe formations.

PG_ANNIVERSAR'

Conclusion

In conclusion, we have characterized the direct hydrocarbon anomalies that we detected through the application of spectral decomposition, with more detailed analysis employing extended elastic impedance for deriving effective porosity and volume of clay from seismic data. The good correlation of these volumes with the available respective petrophysical well log curves has enhanced our confidence in their interpretation.

Astrogeology Total Solar Eclipse 2017 Field Seminar 18-22 August 2017 | Casper, Wyoming

• This unique event will be held in Casper, Wyoming, and features the chance to see the rare total solar eclipse on August 21, 2017. Attend and learn basic astronomy through presentations and star gazing. Jack Schmitt and Jim Reilly will be at the eclipse event to discuss the challenges of a manned mission to Mars, a return to the Moon and a new energy frontier with He-3 fusion.

• By attending, you will also have the opportunity for hands-on field geology at world-class paleontology sites and a documented terrestrial impact site. Make sure you take time to visit the historic petroleum geology sites around Casper, such as nearby Teapot Dome.

Pricing: \$3,800 Single \$3,200 Double Sharing / Cabins / Student



Learn more at aapg.to/fs2017eclipse

Online Opportunities with CEUs:

Big Data & Deep Learning in the Oil Industry: Basics and Applications 22 May 2017

Upcoming Calendar Events:

Drones and UAVs: Solving Problems, Finding Resources 23-24 May 2017 Introduction to Shale Gas

Geothermal Energy Basics: A Renewable Energy Certificate Course Leadership and Strategic Thinking in the Oil & Gas Industry